

Aquamat Mark 8

230 Volt Condensate Pump Unit



SPECIFICATION:

PART NO: AM108

SIZE: 430mm x 215mm x 100mm

WATER TANK CAPACITY: 2 1/2 Litres

PUMP CAPACITY: 250 Litres / Hour @ max head

MAX HEAD OF DRAIN: 12 Metres

PUMP CONTROL: Float switch controlling a power relay

INLET PIPE CONNECTIONS: 1 @ 1" & 1 @ 2"

OUTLET PIPE CONNECTION: 12mm for flexible hose

NON RETURN VALVE: Fitted within control compartment

ELECTRICAL SUPPLY: 230V AC, fused 5 amp

- The *Aquamat Mark 8* is the ideal condensate pump tray for use in a coldroom environment as a wall mounting unit.
- The powerful self-priming pump can remove up to 250 litres per hour up to a height of 12 metres.
- Optional factory fitted high level alarm float switch operating a relay for connection to a Building Management System. (**Part: AM108A**)
- Developed from 20 years experience in the market.
- Over 25000 *Aquamat* units sold.
- Proven track record of first class reliability, widely used by most of the prominent high street stores in the UK and Ireland.
- All units are subject to testing and reliability trials prior to despatch.
- The unit is simple to maintain and service on site.
- Each unit carries a full 12 month warranty - subject to the correct maintenance procedure being followed.
- After-sales service including a comprehensive spare parts stock available for next day delivery.
- Fully CE Certified

Aquamat Mark 8

TECHNICAL SPECIFICATIONS

CASING

Length	: 430mm
Depth	: 100mm
Height	: 215mm
Construction	: Stainless Steel
Inlet Port	: 1 x 1" O/D & 1 x 2" O/D (Sealed in factory)
Outlet Port	: 12mm O/D Brass Connector for Flexible Hose
Non Return Valve	: Fitted Within Unit
Water Tank Capacity	: 2 1/2 Litres

MAINTENANCE

Cleaning of the Water Tank / Filter Mesh	: 2-4 times per year or as required
--	--

ELECTRICAL

Power Requirements	: 230 Volt AC, 50 Hz mains supply required
Power Cord	: 2 Metre mains cable


PUMP MOTOR

Type	: Centrifugal Pump with Prime Bypass
Power Rating	: 230Vac, 0.8 Amp

PUMP PERFORMANCE (see graph below)

Maximum Recommended Head	: 12 Metres
Flow Rate at Max Head	: 250 Litres / Hour
Flow Rate at Zero Head	: 500 Litres / Hour

Flow Rate - 230V Motor

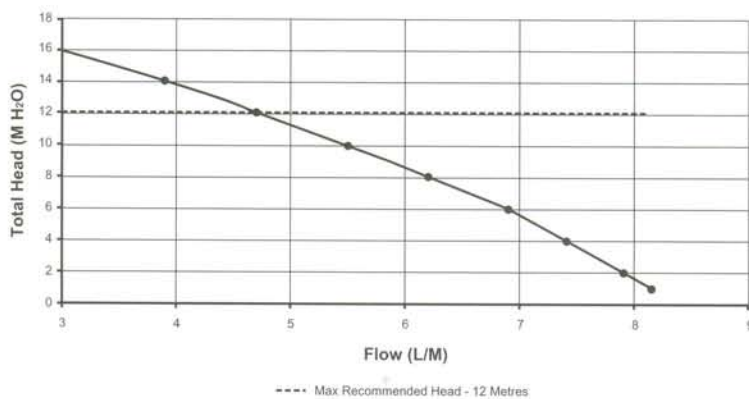

Manufactured by Headglow, a division of Servicepower Ltd.

For sales, spares and enquiries Tel: (01274) 207555 Fax: (01274) 207556